

# SPECIFICATIONS

## HL955A

Powered By Cummins Performance Series Engine



\*Photo may include optional equipment.



**Net Power**  
197 HP (147 kW) at 2,200 rpm

**Operating Weight**  
16,098 kg (35,490 lb) -  
16,490 kg (36,355 lb)

**Standard Bucket**  
2.8 m<sup>3</sup> (3.7 yd<sup>3</sup>)

 **HYUNDAI**  
CONSTRUCTION EQUIPMENT

# SPECIFICATIONS HL955A

| ENGINE                        |  |
|-------------------------------|--|
| Maker / Model                 | CUMMINS / B6.7   |
| Type                          | Tier 4F/ Stage V Emission Certified, 6 cylinder diesel engine with No Manual Regeneration. |
| Gross Power (SAE J1995)       | 200 HP (149 kW) at 2,200 rpm   |
| Net Power (SAE J1349)         | 197 HP (147 kW) at 2,200 rpm   |
| Max. Power                    | 210 HP (157 kW) at 1,900 rpm   |
| Peak Gross Torque (SAE J1995) | 730 lb.ft (990 Nm) at 1,300 rpm  |
| Displacement                  | 6.7 L (408 cu in)  |

| TRANSMISSION          |  |
|-----------------------|--|
| Torque Converter Type | 3-Elements, Single-stage, Single phase |
| Tire                  | 20.5 R25, ★ ★, L3                      |

| Travel Speed, km/h (mph) | 4 speed T/M |             | 5 Speed T/M with lock up clutch |     |
|--------------------------|-------------|-------------|---------------------------------|-----|
|                          | 1st         | 2nd         | 3rd                             | 4th |
| Forward                  | 1st         | 7.1 (4.4)   | 6.4 (4.0)                       |     |
|                          | 2nd         | 11.7 (7.3)  | 11.1 (6.9)                      |     |
|                          | 3rd         | 23.6 (14.7) | 17.1 (10.6)                     |     |
|                          | 4th         | 39.2 (24.4) | 26.6 (16.5)                     |     |
|                          | 5th         | -           | 40.0 (24.9)                     |     |
| Reverse                  | 1st         | 7.4 (4.6)   | 6.7 (4.2)                       |     |
|                          | 2nd         | 12.3 (7.6)  | 11.7 (7.3)                      |     |
|                          | 3rd         | 24.9 (15.5) | 28.0 (17.4)                     |     |

| AXLES                 |                                  |
|-----------------------|----------------------------------|
| Drive System          | Four-wheel drive system          |
| Front                 | Fixed                            |
| Rear Axle Oscillation | Oscillating ± 11 ° degrees       |
| Hub Reduction         | Planetary reduction at wheel end |
| Differential          | Conventional                     |
| Reduction Ratio       | 23.333                           |

| HYDRAULIC SYSTEM                        |   |
|---|---|
| Type                                    | Load sensing hydraulic system   |
| Pump                                    | Variable displacement piston pump,  |
| Control Valve                           | 2 spool (Bucket, Boom)<br>3 spool (Bucket, Boom, Aux)   |
| System Pressure                         | 280 bar (3,980 psi)   |
| Lift Circuit                            | The valve has four functions: raise, hold, lower and float can adjust automatic kickout from horizontal to full lift.             |
| Tilt Circuit                            | The valve has three functions : tilt back, hold and dump.<br>Can adjust automatic bucket positioner to desired load angle.        |
| Cylinder                                | Type : Double acting<br>No. of cylinders-bore x stroke:   |
|   | Lift 2-125 × 745 mm (2-4.9" × 29.3")  |
|   | HL955A Tilt 1-140 × 560 mm (1-5.5" × 1' 10")<br>HL955A XT Tilt 1-140 × 585 mm (1-5.5" × 1' 11")                                   |
| Hydraulic Cycle Time with Rated Payload | Raise from Carry Position: 5.5 Sec.<br>Dump, at maximum raise: 1.8 Sec.<br>Lower, empty, float down: 3.9 Sec.<br>Total: 11.2 Sec. |

| OVERVIEW              |                                 |                       |
|-----------------------|---------------------------------|-----------------------|
| Description           | HL955A                          | HL955AXT              |
| Operating Weight      | 16,098 kg (35,490 lb)           | 16,490 kg (36,355 lb) |
| Bucket Capacity       | Heaped 2.8 m³ (3.7 yd³)         | 2.8 m³ (3.7 yd³)      |
|                       | Struck 2.4 m³ (3.1 yd³)         | 2.4 m³ (3.1 yd³)      |
| Breakout Force-Bucket | 14,370 kg (31,685 lb)           | 14,540 kg (32,060 lb) |
| Tipping Load          | Straight 11,988 kg (26,430 lb)  | 9,400 kg (20,725 lb)  |
|                       | Full Turn 10,408 kg (22,945 lb) | 8,150 kg (17,970 lb)  |

| TIRES           |                               |
|-----------------|-------------------------------|
| Type            | Tubeless, loader design tires |
| Standard        | 20.5 R25, ★ ★, L3             |
| Options Include | 20.5 R25, ★, XHA              |
|                 | 20.5-25, 16PR, L3             |
|                 | 20.5-25, 16PR, L5             |

| BRAKES          |   |
|-----------------|---|
| Service Brakes  | Hydraulically actuated, wet disc brakes actuate all 4 wheels independent axle-by-axle system. Self adjusting & wheel speed brake. |
| Parking Brake   | Spring-applied, hydraulically released brake  |
| Emergency Brake | When brake oil pressure drops, indicator light alerts operator and parking brake automatically applies.                           |

| STEERING SYSTEM |  |
|-----------------|--|
| Type            | Load sensing hydrostatic articulated steering                            |
| Pump            | Variable displacement piston pump  |
| System Pressure | 210 bar (3,046 psi)  |
| Cylinder        | Double acting 2-70 mm (2.8") x 418 mm (16.5")                            |
| Steering Angle  | 40° to both right and left angle, respectively                           |
| Features        | Center-point frame articulation.<br>Tilt and telescopic steering column. |

| SERVICE REFILL CAPACITIES         |                           |
|-----------------------------------|---------------------------|
| Fuel Tank                         | 230 liters (60.8 US gal)  |
| Def Tank                          | 30.1 liters (8.0 US gal)  |
| Cooling System                    | 42 liters (11.1 US gal)   |
| Crankcase                         | 18.0 liters (4.8 US gal)  |
| Transmission                      | 43.5 liters (11.5 US gal) |
| Front Axle                        | 35 liters (9.2 US gal)    |
| Rear Axle                         | 35 liters (9.2 US gal)    |
| Hydraulic Tank                    | 110 liters (29.1 US gal)  |
| Hydraulic System (Including Tank) | 190 liters (41.8 US gal)  |


| CAB NOISE LEVEL  |  |
|--|--|
| Guaranteed noise level presented below can be differed depending on a range of factors such as operating condition, speed of a cooling fan, types of engine and so forth. Hearing protection shall be necessary if an operator is working in the improperly maintained cabin or exposed to a noisy environment by leaving doors and/or windows open. |  |

|  |           |
|--|-----------|
| With cooling fan speed at maximum value:                           |           |
| Operator sound pressure level (ISO 6396:2008)                      | 67 dB(A)  |
| Exterior sound power level (ISO 6395:2008)                         | 103 dB(A) |
| * Distance of 15 m (49.2 ft), moving forward in second gear ratio. |           |

| CABIN  |  |
|--|--|
| ROPS / FOPS Cabin Meet ISO 3471 and ISO 3449 |  |

## HL955A DIMENSIONS

All dimensions are approximate.

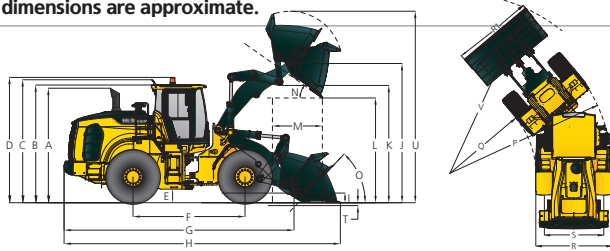

Unit : mm (ftn)

| Description                                     | HL955A          | HL955AXT        |
|---|-----------------|-----------------|
| A Height to Top of Exhaust Pipe                 | 3,320 (10' 11") | 3,320 (10' 11") |
| B Height to Top of Cabin                        | 3,390 (11' 1")  | 3,390 (11' 1")  |
| C Height to Top of Product Link Antenna         | 3,440 (11' 3")  | 3,440 (11' 3")  |
| D Height to Top of Warning Beacon               | 3,520 (11' 7")  | 3,520 (11' 7")  |
| E Ground Clearance                              | 410 (1' 4")     | 410 (1' 4")     |
| F Wheelbase                                     | 3,050 (10')     | 3,050 (10')     |
| G Overall Length (without Bucket)               | 6,430 (21' 1")  | 7,025 (23' 1")  |
| H Shipping Length (with Bucket Level on Ground) | 7,715 (25' 4")  | 8,310 (27' 3")  |
| I Hinge Pin Height at Carry Position            | 440 (1' 5")     | 610 (2')        |
| J Hinge Pin Height at Maximum Lift              | 3,940 (12' 11") | 4,515 (14' 10") |

| Description  | HL955A          | HL955AXT        |
|--|-----------------|-----------------|
| K Lift Arm Clearance at Maximum Lift               | 3,340 (10' 11") | 3,905 (12' 10") |
| L Dump Clearance at Maximum Lift and 45° Discharge | 2,785 (9' 2")   | 3,360 (11')     |
| M Reach at Maximum Lift and 45° Discharge          | 1,180 (3' 10")  | 1,220 (4')      |
| N Dump Angle at Maximum Lift and Dump (on Stops)   | 48              | 48              |
| O Roll Back Angle                                  | Ground          | 41              |
|  | Carry           | 46              |
| P Clearance Circle (Diameter) to Outside of Tires  | 11,140 (36' 7") | 11,140 (36' 7") |
| Q Clearance Circle (Diameter) to Inside of Tires   | 5,980 (19' 4")  | 5,980 (19' 4")  |
| R Width Over Tires (Unloaded)                      | 2,530 (8' 4")   | 2,530 (8' 4")   |
| R1 Overall Width (with bucket)                     | 2,740 (9')      | 2,740 (9')      |
| S Tread Width                                      | 2,010 (6' 7")   | 2,010 (6' 7")   |

## HL955A OPERATING SPECIFICATIONS WITH BUCKETS

| Linkage<br>Bucket Type<br>Edge Type                   |                 | General Purpose<br>Pin On |                         | General Purpose<br>Hook On | High Lift Linkage<br>Change |
|---|-----------------|---------------------------|-------------------------|----------------------------|-----------------------------|
|   |                 | Bolt-On Cutting Edges     | 2 Piece Tooth & Segment | Bolt-On Cutting Edges      |                             |
| Capacity - Rated                                      | m <sup>3</sup>  | 2.8                       | 2.8                     | 2.8                        | -                           |
|   | yd <sup>3</sup> | 3.7                       | 3.7                     | 3.7                        |                             |
| Capacity - Rated at 110% Fill Factor                  | m <sup>3</sup>  | 3.1                       | 3.1                     | 3.1                        | -                           |
|   | yd <sup>3</sup> | 4.0                       | 4.0                     | 4.0                        |                             |
| Width   | mm              | 2,740                     | 2,810                   | 2,740                      | -                           |
|   | ft/in           | 9'                        | 9' 3"                   | 9'                         |                             |
| Dump Clearance at Maximum Lift and 45° Discharge      | mm              | 2,785                     | 2,660                   | 2,600                      | +575                        |
|   | ft/in           | 9' 2"                     | 8' 9"                   | 8' 6"                      | 1' 11"                      |
| Reach at Maximum Lift and 45° Discharge               | mm              | 1,180                     | 1,275                   | 1,355                      | +40                         |
|   | ft/in           | 3' 10"                    | 4' 2"                   | 4' 5"                      | +1.6"                       |
| Digging Depth   | mm              | 85                        | 85                      | 85                         | +35                         |
|   | ft/in           | 3"                        | 3"                      | 3"                         | +1.4"                       |
| Shipping Length (with Bucket)                         | mm              | 7,715                     | 7,870                   | 7,970                      | +595                        |
|   | ft/in           | 25' 4"                    | 25' 10"                 | 26' 2"                     | +1' 11"                     |
| Overall Height with Bucket at Maximum Lift            | mm              | 5,330                     | 5,330                   | 5,515                      | +575                        |
|   | ft/in           | 17' 6"                    | 17' 6"                  | 18' 1"                     | +1' 11"                     |
| Loader Clearance Circle with Bucket at Carry Position | mm              | 12,550                    | 12,720                  | 12,700                     | +600                        |
|   | ft/in           | 41' 2"                    | 41' 9"                  | 41' 8"                     | +1' 12"                     |
| Static Tipping Load, Straight (No Tire Deflection)*   | kg              | 11,350                    | 11,300                  | 10,200                     | -1150                       |
|   | lb              | 25,025                    | 24,915                  | 22,490                     | -2,535                      |
| Static Tipping Load, Articulated (No Tire Deflection) | kg              | 9,850                     | 9,800                   | 8,850                      | -1000                       |
|   | lb              | 21,720                    | 21,610                  | 19,515                     | -2,200                      |
| Breakout Force  | kg              | 14,370                    | 14,370                  | 11,980                     | +170                        |
|   | lb              | 31,685                    | 31,685                  | 26,415                     | +375                        |
| Operating Weight*                                     | kg              | 15,800                    | 15,855                  | 16,175                     | +690                        |
|   | lb              | 34,835                    | 34,955                  | 35,660                     | +1,525                      |

\* All height and tire related dimensions are with standard 20.5 R25, ★★, L3 tires.

## HL955A/ HL955AXT BUCKET SELECTION CHART

Standard Lift Arm - General Purpose Bucket

| Type                             | m <sup>3</sup> (yd <sup>3</sup> ) | Material Density [t/m <sup>3</sup> ]      |               |               |               |               |               |               |   |               |               |               |               |               |               |               |
|----------------------------------|-----------------------------------|---|---------------|---------------|---------------|---------------|---------------|---------------|---|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
|                                  |                                   | 0.8<br>(1349)                             | 0.9<br>(1517) | 1.0<br>(1686) | 1.1<br>(1854) | 1.2<br>(2023) | 1.3<br>(2191) | 1.4<br>(2360) | 1.5<br>(2528)                             | 1.6<br>(2697) | 1.7<br>(2865) | 1.8<br>(3034) | 1.9<br>(3203) | 2.0<br>(3371) | 2.1<br>(3540) | 2.2<br>(3708) |
| Bolt-On Cutting Edge             | 2.8 (3.7)                         | 3.2 m <sup>3</sup> (4.2 yd <sup>3</sup> ) |               |               |               |               |               |               | 2.7 m <sup>3</sup> (3.5 yd <sup>3</sup> ) |               |               |               |               |               |               |               |
| Bolt-On-Teeth                    | 2.8 (3.7)                         | 3.2 m <sup>3</sup> (4.2 yd <sup>3</sup> ) |               |               |               |               |               |               | 2.7 m <sup>3</sup> (3.5 yd <sup>3</sup> ) |               |               |               |               |               |               |               |
| Cutting Edge (ISO Quick Coupler) | 2.8 (3.7)                         | 3.2 m <sup>3</sup> (4.2 yd <sup>3</sup> ) |               |               |               |               |               |               | 2.7 m <sup>3</sup> (3.5 yd <sup>3</sup> ) |               |               |               |               |               |               |               |

High Lift Arm (XT) - General Purpose Bucket

|                                  |           |   |  |  |  |  |  |  |   |  |  |  |  |  |  |
|----------------------------------|-----------|---|--|--|--|--|--|--|---|--|--|--|--|--|--|
| Bolt-On Cutting Edge             | 2.8 (3.7) | 3.2 m <sup>3</sup> (4.2 yd <sup>3</sup> ) |  |  |  |  |  |  | 2.7 m <sup>3</sup> (3.5 yd <sup>3</sup> ) |  |  |  |  |  |  |
| Bolt-On-Teeth                    | 2.8 (3.7) | 3.2 m <sup>3</sup> (4.2 yd <sup>3</sup> ) |  |  |  |  |  |  | 2.7 m <sup>3</sup> (3.5 yd <sup>3</sup> ) |  |  |  |  |  |  |
| Cutting Edge (ISO Quick Coupler) | 2.8 (3.7) | 3.2 m <sup>3</sup> (4.2 yd <sup>3</sup> ) |  |  |  |  |  |  | 2.7 m <sup>3</sup> (3.5 yd <sup>3</sup> ) |  |  |  |  |  |  |

| ENGINE   | STD | OPT |
|--|-----|-----|
| <b>ENGINE, CUMMINS, B6.7</b>   |     |     |
| 3 Stage air precleaner   | •   |     |
| Alternator, 95A  | •   |     |
| Fuel warmer  | •   |     |
| Engine oil level dipstick gauge  | •   |     |
| Fuel / water separator   | •   |     |
| VGT (Variable Geometry Turbo)  | •   |     |
| <b>CLEAN EMISSION MODULE</b>   |     |     |
| DOC, DPf and SCR   | •   |     |
| Active Emission Regeneration (No Manual Regeneration Required)   |     |     |
| Stage V Certified Emissions  | •   |     |
| EGR Free   | •   |     |
| Automatic Regeneration   | •   |     |
| <b>COOLING SYSTEM</b>  |     |     |
| Antifreeze   | •   |     |
| Auto Reversing Fan (adjustable Time/ Interval Frequencies) w/ Manual Override                              | •   |     |
| Coolant Level Sight Gauge  | •   |     |
| Fan guard  | •   |     |
| Wide Fin Radiator  | •   |     |
| <b>POWER TRAIN</b>   |     |     |
| <b>TRANSMISSION</b>  |     |     |
| Transmission F4/R3, computer controlled, electronic soft shift, auto-shift and kick-down features included | •   |     |
| Transmission oil sight level   | •   |     |
| Wide Fin Transmission Oil Cooler   | •   |     |
| <b>AXLE</b>  |     |     |
| Conventional (Rear)  | •   |     |
| Hydraulic lock differential (Front)  | •   |     |
| Limited slip differential (Front / Rear)   |     | •   |
| <b>BRAKE</b>   |     |     |
| Parking brake  | •   |     |
| Service brake (Enclosed wet-disc)  | •   |     |
| <b>TIRES</b>   |     |     |
| 20.5 R25, ★★, L3   | •   |     |
| 20.5 R25, ★, XHA   |     | •   |
| 20.5-25, 16PR, L3  |     | •   |
| 20.5-25, 16PR, L5  |     | •   |
| <b>HYDRAULIC SYSTEM</b>  |     |     |
| Diagnostic pressure taps   | •   |     |
| Hyundai Bio Hydraulic Oil (VG46)   |     | •   |
| Hydraulic oil level sight gauge  | •   |     |
| Hydraulic Oil VG32   |     | •   |
| Hydraulic Oil VG46   | •   |     |
| Wide Fin Hydraulic Oil Cooler  | •   |     |
| <b>HYDRAULIC CONTROL</b>   |     |     |
| Fingertip  |     | •   |
| Joystick   |     | •   |
| <b>ELECTRO-HYDRAULIC CONTROL</b>   |     |     |
| Boom kickout, automatic  | •   |     |
| Bucket positioner, automatic   | •   |     |
| Extra piping for auxiliary function  |     | •   |
| Fingertip  | •   |     |
| Joystick   | •   |     |
| Quick coupler piping   | •   |     |
| Ride control system  | •   |     |
| <b>CAB &amp; INTERIOR</b>  |     |     |
| <b>ALARMS, AUDIBLE AND VISUAL</b>  |     |     |
| Air filter clogging  | •   |     |
| Battery voltage  | •   |     |
| Brake oil pressure   | •   |     |
| DEF low level  | •   |     |
| Engine coolant level   | •   |     |
| Engine coolant temperature   | •   |     |
| Engine oil pressure  | •   |     |
| Fuel level   | •   |     |
| Hydraulic oil temperature  | •   |     |
| Parking brake  | •   |     |
| Service brake oil pressure   | •   |     |
| Seat belt ON/OFF   | •   |     |
| Transmission error   | •   |     |
| Transmission oil temperature   | •   |     |

| CAB & INTERIOR                            | STD | OPT |
|---|-----|-----|
| <b>GAUGES</b>                             |     |     |
| Diesel Exhaust Fluid (DEF) level          | •   |     |
| Engine coolant temperature                | •   |     |
| Fuel level                                | •   |     |
| Horn, electric                            | •   |     |
| Speedometer                               | •   |     |
| Transmission oil temperature              | •   |     |
| <b>INDICATOR LIGHTS</b>                   |     |     |
| Clutch Cut Off                            | •   |     |
| Differential Lock                         | •   |     |
| Engine auto stop                          | •   |     |
| FNR                                       | •   |     |
| High beam                                 | •   |     |
| Parking brake                             | •   |     |
| Pilot cut off                             | •   |     |
| Ride control                              | •   |     |
| Seat belt ON/OFF                          | •   |     |
| Turning light                             | •   |     |
| <b>LCD DISPLAY</b>                        |     |     |
| Clock and fault code                      | •   |     |
| DEF level                                 | •   |     |
| DEF low level                             | •   |     |
| Engine rpm                                | •   |     |
| Horn, electric                            | •   |     |
| Job time and distance                     | •   |     |
| Operating hour counter                    | •   |     |
| Transmission gear range                   | •   |     |
| <b>BATTERIES</b>                          |     |     |
| 850CCA, 12V, 2PCS                         | •   |     |
| <b>LIGHTING SYSTEM</b>                    |     |     |
| Brake lights(Counterweight)               | •   |     |
| LED dome light                            | •   |     |
| 2 Head lights on front tower              | •   |     |
| 2 Head lights (LED) on front tower        |     | •   |
| 2 Stop and tail lights                    | •   |     |
| 4 Turn signals                            | •   |     |
| 2 Working lights on front roof            |     | •   |
| 4 Working lights on front roof            |     | •   |
| 2 Working lights on rear roof             |     | •   |
| 4 Working lights (LED) on front roof      |     | •   |
| 2 Working lights (LED) on rear roof       |     | •   |
| 2 Working lights on grill                 | •   |     |
| 2 Working lights (LED) on grill           | •   |     |
| <b>SWITCHES</b>                           |     |     |
| Battery master switch                     | •   |     |
| Differential Lock                         | •   |     |
| Emergency steering                        |     | •   |
| FNR shifter                               | •   |     |
| Hazard                                    | •   |     |
| Parking                                   | •   |     |
| Pilot cut off                             | •   |     |
| <b>SYSTEM MEMORY SETTINGS</b>             |     |     |
| Autolube, integrated in secondary display |     | •   |
| Auto position                             | •   |     |
| Beacon light                              |     | •   |
| Fine modulation                           | •   |     |
| Main light                                | •   |     |
| Mirror heat                               | •   |     |
| Quick coupler                             | •   |     |
| Rear wiper                                | •   |     |
| Ride control                              | •   |     |
| Work light                                | •   |     |
| Work load                                 | •   |     |
| <b>IGNITION</b>                           |     |     |
| Key                                       | •   |     |
| Push Start Button                         |     | •   |
| <b>CAB (SOUND SUPPRESSED)</b>             |     |     |
| 24V to 12V DC converter (20A)             | •   |     |
| Coat hook                                 | •   |     |
| Magazine pocket                           | •   |     |
| One door cab                              | •   |     |
| Radio / USB player                        | •   |     |
| Rear view mirrors (1 Inside)              | •   |     |
| Rear view mirrors (2 Outside, heated)     | •   |     |

| CAB & INTERIOR  | STD | OPT |
|---|-----|-----|
| <b>CAB(SOUND SUPPRESSED)</b>                                  |     |     |
| Roller type sunshade (Front window)                           | •   |     |
| ROPS / FOPS CAB.  | •   |     |
| Rubber floor mat  | •   |     |
| Steering column, tilt and telescopic                          | •   |     |
| Steering wheel with knob                                      | •   |     |
| Tinted safety glass   | •   |     |
| Wrist rest  | •   |     |
| <b>DOOR</b>   |     |     |
| Door and cab locks, one key                                   | •   |     |
| Doors, service access (Locking)                               | •   |     |
| Doors, service access (Remote control)                        |     | •   |
| <b>AUTOMATIC CLIMATE CONTROL</b>                              |     |     |
| Air conditioner & heater                                      | •   |     |
| Defroster   | •   |     |
| Intermittent wiper and washer, front and rear                 | •   |     |
| <b>SEAT</b>   |     |     |
| 3" Retractable seat belt & adjustable air suspension (Heated) | •   |     |
| <b>PERSONAL STORAGE SPACE</b>                                 |     |     |
| Console box   | •   |     |
| Holder, can and cup   | •   |     |
| <b>PEDALS</b>   |     |     |
| Accel pedal without ECO switch                                | •   |     |
| Dual-brake pedal  |     | •   |
| One accelerator pedal   | •   |     |
| One brake pedal   | •   |     |
| <b>SAFETY</b>   |     |     |
| Alarm, back-up  | •   |     |
| Boom safety lock  |     | •   |
| Emergency steering  |     | •   |
| Emergency stop  | •   |     |
| Fire extinguisher   |     | •   |
| <b>OBJECT DETECTION</b>                                       |     |     |
| AAVM - All Around View Monitoring                             |     | •   |
| IMOD (Intelligent Moving Object Detection)                    |     | •   |
| RADAR + Secondary Mornitor                                    |     | •   |
| <b>OTHERS</b>   |     |     |
| 2nd Monitor   |     | •   |
| 3 Spool MCV   | •   |     |
| 5 speed T/M with lockup clutch                                |     | •   |
| Air Compressor  |     | •   |
| Auto Engine Shut Down   | •   |     |
| Auto Grease System  |     | •   |
| Articulation Locking Bar                                      | •   |     |
| Heavy Counterweight   | •   |     |
| Hi-Mate, Satellite  |     | •   |
| ISO Quick Coupler   | •   |     |
| LED Beacon Lamp   |     | •   |
| License Plate & 10W LED Lamp                                  |     | •   |
| Lift and tie-down hooks                                       | •   |     |
| Loader linkage, sealed  | •   |     |
| Sun Shade on Rear Window of Cabin                             |     | •   |
| Vandalism protection caplocks                                 | •   |     |
| Wheel Chocks  |     | •   |
| <b>SAFETY</b>   |     |     |
| Handrails   | •   |     |
| Ladders   | •   |     |
| Platforms   | •   |     |
| Steps   | •   |     |
| <b>TELEMATICS</b>   |     |     |
| ECD (Engine Connected Diagnostics)                            | •   |     |
| Hi MATE   |     | •   |
| <b>GUARDS</b>   |     |     |
| Belly-Pan Guard   |     | •   |
| Crankcase   | •   |     |
| Fenders (Front)   | •   |     |
| Fenders (Rear)  |     | •   |
| Transmission  | •   |     |

\* Standard and optional equipment may vary. Contact your Hyundai dealer for more information. The machine may vary according to International standards.  
 \* The photos may include attachments and optional equipment that are not available in your area.  
 \* Materials and specifications are subject to change without advance notice.  
 \* All imperial measurements rounded off to the nearest pound or inch.



www.hceamericas.com  
 6100 Atlantic Blvd., Norcross, GA 30071  
 TEL (678) 823-7777 FAX (678) 823-7778

PLEASE CONTACT